

Frontline® X240

Wireless Wideband Analyzer



Key Features and Benefits


- Flexible configuration options available
- Complete captures of the technologies you need (Bluetooth BR/EDR and Low Energy, 802.11 a/b/g/n and ac 3x3 MIMO, and 802.15.4)
- Small footprint, USB bus powered and car adapter (included) for exceptional mobility
- Faster root cause analysis on Bluetooth protocol and audio issues with the included Bluetooth Audio Expert System and optional Bluetooth Protocol Expert System
- Manual and automatic gain controls for easy adaptations to every environment
- Live or post-capture decryption and analysis
- All Bluetooth profiles and protocols supported through the latest specification
- Excursion Mode allows for one-button PC-free captures
- Spectrum analysis helps identify potential RF conflicts
- Support for latest mesh technology
- Wired capture via two highly user-configurable 8-channel HCI UART/Logic Pods
- Capture and decode HCI UART (H4, H5, BCSP, and WCI-2)
- 16 channel logic analyzer

Teledyne LeCroy's Frontline X240 Wireless Wideband Analyzer, featuring flexible technology-based licensing and exceptional portability, brings 2.4GHz and 5GHz ISM bands analysis to every lab and every environment efficiently and affordably. Coupled with Teledyne LeCroy's Wireless Protocol Suite software's streamlined UI and superior decoding engine, the X240 is equipped to decode Bluetooth BR/EDR and Low Energy, 802.11, and 802.15.4 traffic for more rapid, robust, and cost-effective wireless development, testing and troubleshooting.

With the Frontline X240 Wireless Wideband Analyzer, Teledyne LeCroy takes wireless protocol analysis to the next level for the maximum value. With Bluetooth audio analysis, spectrum analysis, Excursion Mode for PC-free captures, up to 16 logic channels, and powered by USB, the Frontline X240 makes it possible to capture and decode the wireless technology you're developing or troubleshooting in even the most challenging settings.

The Right Tool for the Job

With the Frontline X240, a new a la carte licensing model allows the user to create the right tool for every job. Equip the X240 with any single technology (Bluetooth BR/EDR, Bluetooth LE, 802.11 a/b/g/n and ac, or 802.15.4) or any combination of those technologies for a tool that's no less than exactly what you need, and no more than you need to buy. CrossSync™ functionality allows you to connect multiple X240 units together to capture multiple technologies simultaneously, and facilitates antenna diversity.

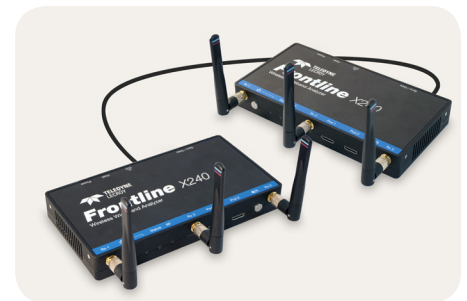

Maximum Mobility

Since wireless applications are ubiquitous, the need for mobility during testing is essential. The Frontline X240 was designed with this need in mind. Teledyne LeCroy has packed maximum capturing power in a package that's only a little bigger than a paperback novel.

But portability is about more than just size. The Frontline X240 comes equipped with a car adapter for mobile automotive applications, and can be powered by USB when AC power is hard to come by. And when true mobility is called for, Excursion Mode will allow the user to capture everything in the air at the push of a button, without any PC attached.

Specifications


- Power**
 USB Type C connector
 USB Wall Adapter with Power Delivery
 USB Car Adapter with Power Delivery
 Power over Ethernet
- Dimensions and Weight**
 7.5" wide X 4" deep X 1" tall
 190.5 mm X 101.6 mm X 25.4 mm
 1.5 lbs
- Bus Type**
 USB Type C
 Ethernet (10, 100, 1000 Mbps)
- Operating Frequency of SDR used for Bluetooth and 802.15.4**
 2395MHz - 2485MHz
- Operating Frequency of WiFi Module**
 802.11 a/b/g/n (2.400GHz-2.4835GHz)
 802.11 n/ac (5.150GHz-5.825GHz)
- Sensitivity Range**
 -90dBm to +10 dBm
- Supported Demodulators**
 BR/EDR and LE (GFSK, $\pi/4$ DQPSK, 8DPSK)
- Logic Analyzer Timestamp Resolution**
 5ns
- Operating Temperature**
 0° to +40°C (32° to 104°F)
- Humidity**
 Operating: 10% to 90% RH (noncondensing)
- Regulatory Compliance**
 FCC part 15 B ARIB T-66
 IEC60950 PSE
 NRTL EMC
 CE WPC
- OS Supported**
 Windows 10
- USB Port**
 USB 2.0, USB 3.0

Streamlined User Interface

The Wireless Protocol Suite combines all the power and maturity of Frontline's protocol analysis software with a fresh new interface that brings all analysis tools into a single docking framework window which you can customize to your own preferred way of working.

It's all there; message sequence charts, packet error rate statistics, throughput graphs, timelines, and all of the other windows into these complex technologies are now available as dockable windows, and are supported by the mature and robust decodes that come from the decades of experience in wireless protocol analysis embodied by Teledyne LeCroy's Frontline brand of protocol analyzers. The software can also work with other Teledyne LeCroy protocol analysis tools for unparalleled cross-protocol debugging.

The Frontline X240 Wireless Wideband Analyzer delivers all the bells and whistles of a world class wireless protocol analyzer that's perfectly tailored to your specific debugging environment; perfect for your needs and your budget.

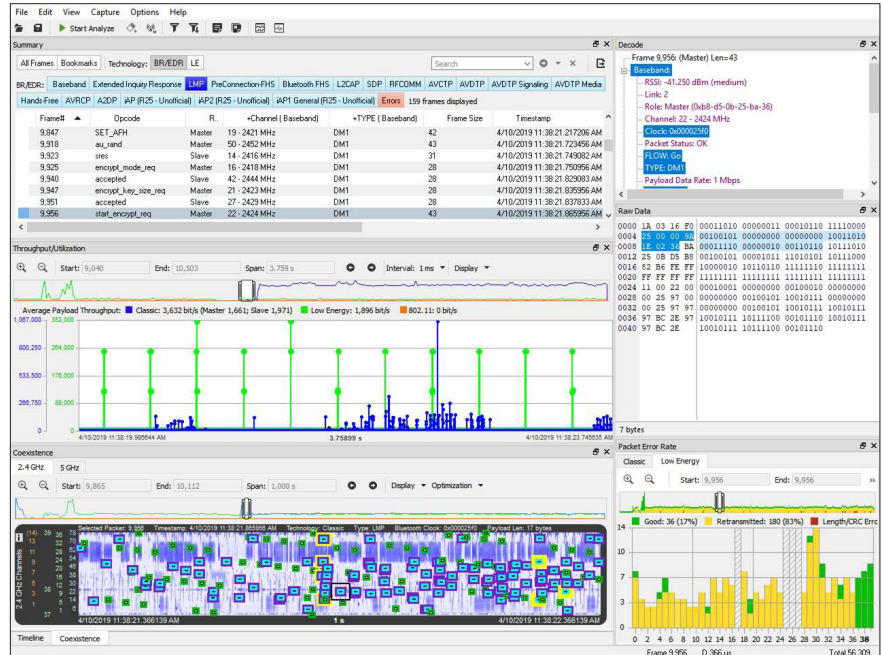

Ordering Information

Product Description

Frontline X240 System Hardware
 HCI UART/Logic 8 Channel Pod
 CrossSync Cable Kit

Bluetooth LE Software License
 BR/EDR Software License
 802.11 a/b/g/n and ac Software License
 802.15.4 Software License

Spectrum Analysis License
 Excursion Mode License
 Bluetooth Protocol Expert System License

Product Code

2014-26000-000
 2300-00036-000
 2300-00037-000

 2013-22260-001
 2013-22260-002
 2013-22260-003
 2013-22260-004

 2013-22260-005
 2013-22260-006
 2013-22001-006

To order or for more information:

www.fte.com/X240
 frontline_onlinesales@teledyne.com
 1.800.359.8570 US & Canada
 +1.434.984.4500
 Fax: 434.984.4505



TELEDYNE LECROY
 Everywhere you look™